



Thermowell OG1, OG2, OG3

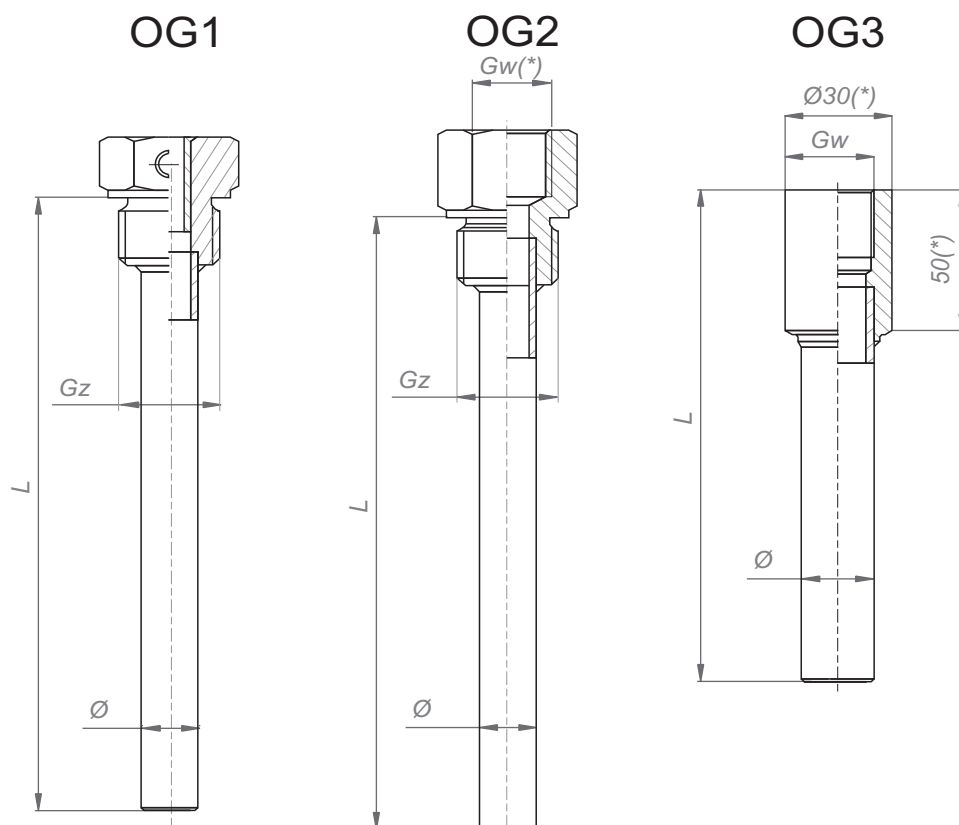


Material	Diameter Ø [mm]	External thread	Internal thread	Mounting length L [mm]
15HM	15x3	M20x1.5 G1/2"	M20x1.5 G1/2"	50 ... 1000
1.4301	12x1			
	15x1.5			
	15x2			


Ordering procedure:

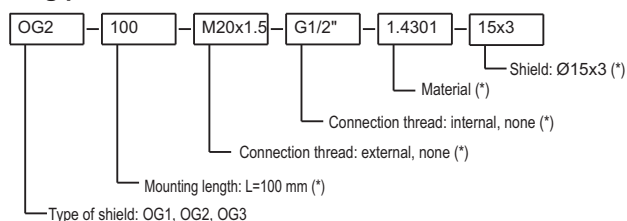


ADMISSIBLE LOADS FOR PARTICULAR TYPES OF SHIELDS AT SPECIFIED WORKING CONDITIONS

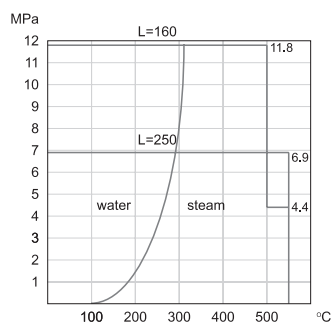

Graph 1. Admissible load of the G1 and T1 shields at the conditions of work - 15 HM, 1H18N9T, H17N13M2T

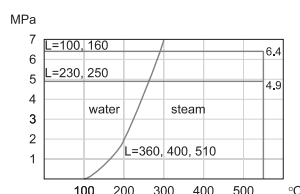

Graph 2. Admissible load of the GN1 and GB1 shields at the conditions of work - 15 HM, 1H18N9T, H17N13M2T

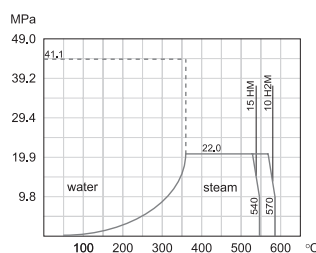

Graph 3. Admissible load of the SW1 and SW2 shields at the conditions of work