


0,1 mm resolution

NIVOTRACK

MAGNETOSTRICTIVE TRANSMITTERS

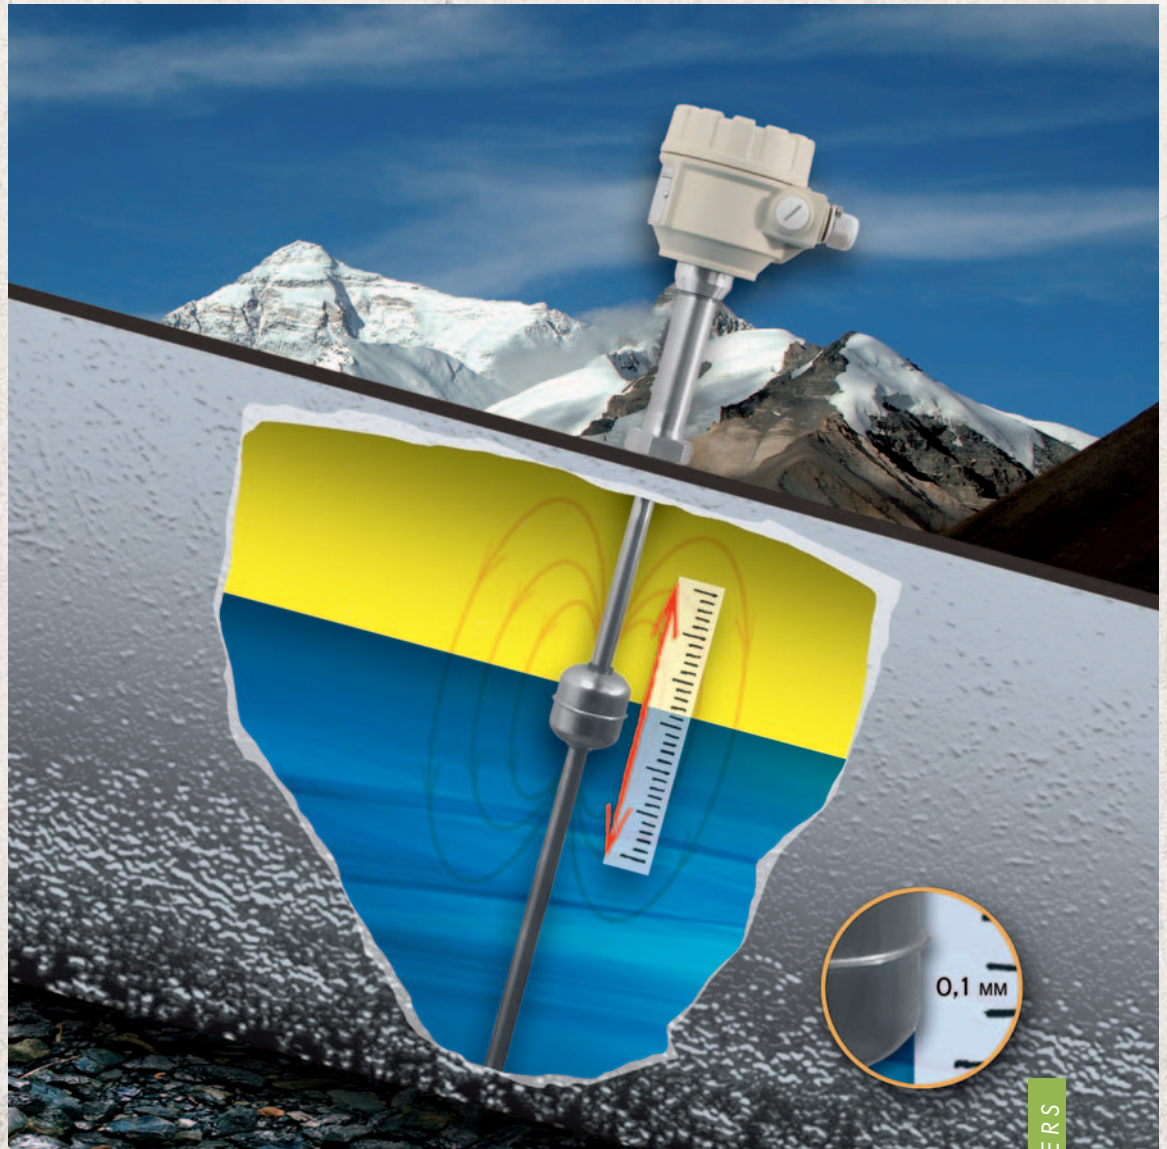

LEVEL TRANSMITTERS

OUR PROFESSION IS YOUR LEVEL

NIVOTRACK MAGNETOSTRICTIVE TRANSMITTERS

MAIN FEATURES

- 0,1 mm or 1 mm resolution
- Intrusion length maximum 10 m
- Rigid or flexible guide tube
- Plastic coated version for chemicals
- 4-20 mA and HART output
- Graphical display
- 32 point linearization table
- Measurement optimisation
- Volume measurement
- ATEX certified versions
- OIML certification pending


APPLICATIONS

- Custody transfer measurement
- Oil and gas industry
- Fuels and gasoline products
- Pharmaceutical industry
- Chemical industry
- Food industry
- Alcohols and beverages
- Installation in bypass tubes feasible
- Supplementary level transmitter for NIVOFLIP magnetic flip indicator

GENERAL DESCRIPTION

NIVOTRACK magnetostrictive transmitters are an ideal solution for high accuracy measurement of clean fluids. Its high precision renders the NIVOTRACK suitable for custody transfer measurement of liquids such as fuels, solvents, alcohol derivatives etc. Units with flexible tube do not only make this accurate measurement for higher tanks possible, but offer a more convenient way for shipment and installation. Plastic coated versions of the NIVOTRACK substantially expand the field of application by a wide range of aggressive materials.

Integrating the transmitter into a process control system is easy thanks to the intelligent signal processing and communication software as well as the wide of range of accessories offered.

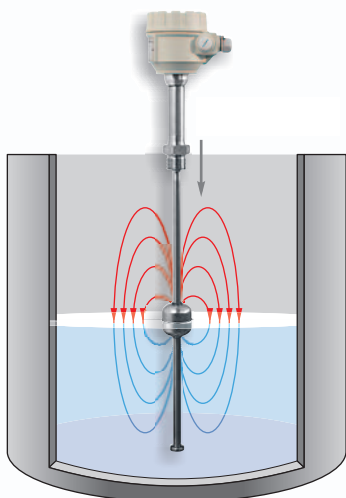

OPERATING PRINCIPLE

A float containing a magnetic disc moves along a guide tube with the specific magnetostrictive wire in it. A pulse generated by the electronics travels along the magnetostrictive wire. At the point the pulse reaches the float's magnetic field, a torsion develops. Reflected from the torsion point, the pulse creates an acoustic wave that travels back along the wire. The 4...20 mA output of the transmitter is proportional to the elapsed time between the excitation and detection.

POSITION OF THE DISPLAY

Vertical and horizontal display position is offered for optimal mounting in your application.



„A“ position

„B“ position



TECHNICAL DATA

Type		Rigid probe version	Flexible probe version	Rigid probe, plastic coating	Flexible probe, plastic coating
Measured process value		Liquid level, distance, volume			
Nominal length (L)		0,5 m ... 4,5 m	2 m ... 10 m	0,5 m ... 3 m	2 m ... 10 m
Material of the tube		Stainless steel: DIN 1.4571		PFA coated stainless steel	
Max. medium pressure*		2,5 MPa (25 bar)		0,5 MPa (5 bar)	
Medium temperature		-40 °C ... +90 °C see temperature diagram			
Resolution		0,1 mm or 1 mm			
Linearity with dry calibration		± 0,25 mm or ± 1 mm			
Temperature coefficient		0,04 mm / 10 °C (-40...+70 °C)			
Range span		Maximum range: see dimensions ; Minimum range: 200 mm			
Zero point offset		Anywhere within the range			
Float diameter / material**		Ø 53,5 x 59 mm cylinder / 1.4404	Ø 95 mm ball / 1.4404	Ø 76 x 87 mm cylinder / PVDF	
Medium density		Depends on the applied float			
Material of wetted parts		Stainless steel: DIN 1.4571, 1.4404		PFA, PVDF	
Ambient temperature		-40 °C ... +70 °C see temperature diagram			
Output	Analogue	4...20 mA (limit values: 3,9 ... 20,5 mA)			
	Serial comm.	HART (close end resistor: 250 ohm)			
	Display	SAP-300 graphical display			
Damping time		Adjustable 10 s, 30 s, 60 s or 0 ...60 s			
Error indication		Current output = 22 mA or 3,8 mA			
Output load		Rt = (Ut-12,5V) / 0,02 A, Ut = power supply voltage			
Power supply		12,5 V ... 36 V DC			
Electrical protection		Class III.			
Ingress protection		IP 67			
Process connection		as per order code			
Electric connection		Cable gland M 20 x 1.5, cable outer diameter: d=6 ...12 mm, wire cross section: max.1.5 mm²			
Housing		Paint coated aluminium (AlSi12) or plastic (VALOX 412)			
Mass		1,7 kg + m. probe: 0,6 kg/m	2,9 kg + m. probe: 0,3 kg/m + counter weight: 3,5 kg	1,7 kg + m. probe: 0,7 kg/m	1,7 kg + m. probe: 0,4 kg/m + counter weight: 3,5 kg

* Depends on selected float

** Requested float type should be specified when placing an order

SPECIAL DATA FOR EX CERTIFIED MODELS


Protection type	ia	d	d ia
EX marking	ATEX II 1 G EEx ia IIB T6...T5 0,5 ... 10 m	ATEX II 2 G EEx d IIB T6...T5	ATEX II 1/2 G EEx d ia IIB T6...T5 0,5 ... 10 m
Power supply and signal circuit limits	$U_{imax} = 30 V$	$I_{imax} = 140 mA$	$P_{imax} = 1 W$ $C_i < 60 nF$ $L_i < 200 \mu H$
Cable gland	Steel M 20 x1,5 cable gland EEx ia	Steel M 20 x1,5 cable gland EEx d	
Cable outer diameter	Ø 7 ...13 mm		Ø 9 ...11 mm

TEMPERATURE PARAMETERS

Temperature limits for EX version

Type	Temp. class	Max. ambient temp.	Max. medium temp.
Rigid probe	T6	70°C	80°C
Rigid or flexible probe with plastic coating			70°C
Flexible probe			90°C
Rigid or flexible probe with plastic coating	T5	55°C	90°C

Temperature diagram

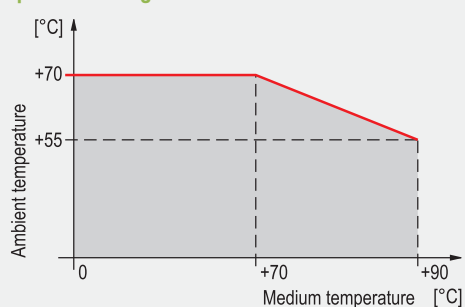

Lower temperature limit





Type	Protection type		
	ia	d	d ia
Transmitter	-40°C		
Transmitter with display	-25°C	-20°C	

DIMENSIONS

Rigid probe with threaded process connection	Rigid probe without process connection *	Rigid probe with plastic coating without process connection *
Flexible probe with sliding sleeve and counterweight	Flexible probe with plastic coating, sliding sleeve and counterweight	

* Process connection to be ordered separately

FLOATS


Type	MBA-505-2M-200-00*	MBK-530-2M-400-00**	MBA-505-2M-900-00**	MGU-505-2M-200-00**
Dimensions				
Medium density (min.)	0,85	0,55	0,4	0,7
Medium pressure	2,5 MPa (25 bar)			0,5 MPa (5 bar)
Material	1.4404			PVDF

* Designed for min. 2" process connection, only order with rigid probe


** Flange to be ordered separately

PROCESS CONNECTION

Type	Material	Proc. Conn.	Dimensions			
			S (mm)	H (mm)	L (mm)	B (mm)
MBH-105-2M-300-00	1.4571	1" BSP	41	36	20	–
MBK-105-2M-300-00	1.4571	2" BSP	70	43	24	–
MBL-105-2M-300-00	1.4571	1" NPT	41	38	–	≈ 10
MBN-105-2M-300-00	1.4571	2" NPT	70	43	–	≈ 11
MGH-105-2M-300-00	PVDF	1" BSP	46	42	22	–

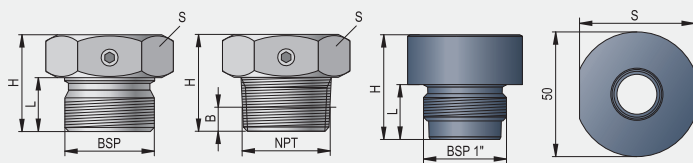

WIRING

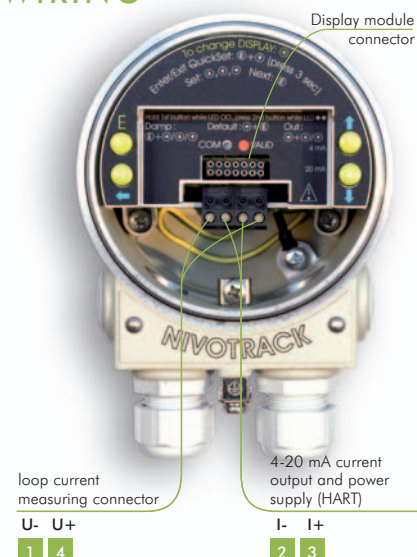

NIVOTRACK IN SYSTEM WITH PC



The instrument with HART output can be connected to a PC using a SAT-304 HART USB modem. Max. 15 normal (non Ex) instruments can be connected to a HART line. Measured values can be visualised and/or the instruments can be programmed via digital HART communication. Applicable software: **EView** configuration software or **NIVISION** process visualization software.

NIVOTRACK IN A HART MULTIDROP LOOP

MULTICONT can handle a max. of 15 HART capable transmitters (4 Ex-version transmitters). The digital (HART) information is processed, displayed and if needed it can be transmitted via RS485 communication line to a PC. Remote programming of the transmitters is also possible. Visualisation on PC can be accomplished with **NIVISION** process visualisation software.



ORDER CODES (NOT ALL COMBINATIONS AVAILABLE)

NIVOTRACK magnetostrictive level transmitters

NIVOTRACK M ■ ■ ■ ■ ■ ■ ■ 1

Type	Code
Transmitter	T
Transmitter + display ²	B
Transmitter with plastic coated probe	E
Transmitter + display with plastic coated probe ²	G

Housing	Code
Aluminium	5
Plastic ³	6

Output / Resolution / Ex	Code
4-20 mA / 0,1 mm	1
4-20 mA / 1 mm	2
4-20 mA + HART / 0,1 mm	3
4-20 mA + HART / 1 mm	4
4-20 mA / 0,1 mm / EExia	5
4-20 mA / 1 mm / EExia	6
4-20 mA + HART / 0,1 mm / EExia	7
4-20 mA + HART / 1 mm / EExia	8
4-20 mA / 0,1 mm / EExd	A
4-20 mA / 1 mm / EExd	B
4-20 mA / 0,1 mm / EExd+EExia	C
4-20 mA + HART / 0,1 mm / EExd+EExia	D

Probe type / Process connection	Code
Rigid / 1" BSP	A
Rigid / 2" BSP	C
Rigid / 1" NPT	D
Rigid / 2" NPT	G
Rigid / w/o process conn. ⁴	U
Flexible / 2" BSP	K
Flexible / 2" NPT	N
Flexible / w/o process conn. ⁵	Z

Code	Probe length	Code
0	0 m	0
1	1 m	0,1 m
2	2 m	0,2 m
⋮	⋮	⋮
9	9 m	0,9 m
A	10 m	

1) The order code of an Ex version should end in „Ex“
 2) The position of the display (A or B) should be specified in the order
 3) Not available in Ex version

4) Threaded sliding sleeve should be ordered separately
 5) Sliding sleeve with flange should be ordered separately

ACCESSORIES

Flanges

MFT ■ ■ ■ ■ ■

Standard / Material	Code
DIN / A38	1
DIN / 1.4571	2
DIN / PP	3
DIN / A38 +, PTFE	4
ANSI / A38	5
ANSI / 1.4571	6
ANSI / PP	7
ANSI / A38 + PTFE	8

Size		Code
DIN	ANSI	
DN50	1"	0
DN65	2 1/2"	1
DN80	3"	2
DN100	4"	3
DN125	5"	4
DN150	6"	5
DN200	8"	6

Pressure	Code
PN16 / 150 psi	1
PN25 / 300 psi	2

Middle facility	Code
1" BSP	2
2" BSP	3
1" NPT	5
2" NPT	6

Floats

Type	Diameter / Material
MBA-505-2M-200-00	Ø 53,5 mm / 1.4571
MBK-530-2M-400-00	Ø 95 mm / 1.4571
MGU-505-2M-200-00	Ø 76 mm / PVDF
MBA-505-2M-900-00	Ø 124 mm / 1.4571

Threaded sliding sleeve

Type	Process connection
MBH-105-2M-300-00	1" BSP
MBK-105-2M-300-00	2" BSP
MBL-105-2M-300-00	1" NPT
MBN-105-2M-300-00	2" NPT
MGH-105-2M-300-00	1" BSP / PVDF, for plastic coated version

Other accessories

Type	Description
SAP-300	Plug-in display module
SAT-304	HART-USB modem
SAS-302	EView software

NIVELCO PROCESS CONTROL CO.

H-1043 BUDAPEST, DUGONICS U. 11.

TEL.: (36-1) 889-0100 ♦ FAX: (36-1) 889-0200

E-mail: sales@nivelco.com http://www.nivelco.com